

SPK ELECTRONICS CO., LTD.

Touch Screen Specification

Model : TR4-121F-21 (80F4-4185-C1219)
Version : V 1.1
Date : February 14, 2006

Version	Revise Date	Content	Remark
V1.1	2006/02/14	ROHS / tail change	
V 1.0	2005/1/20	Initial	

Add : 10F,NO.510,SEC.5,CHUNG HSIAO E. RD, TAIPEI, TAIWAN

Tel : 02-2346-2323

Fax : 02-2346-3939

E-mail : spktw@ms34.hinet.net WEB:<http://www.spkecl.com>

SPK ELECTRONICS CO., LTD.

1. FEATURES

Type	Four-Wire Analog Resistive Touch Panel		
Structure	Material	Thickness	Type
	ITO/PET	188um	Non-Glare
	ITO/GLASS	1.85mm	Normal type
Input Mode	Stylus or Finger		
Connector	FPC		
ROHS Compliance	Yes		

2. GENERAL SPECIFICATION

Item		Specification (<i>unit in mm except as noted</i>)
(1)	Frame Size	268.50 ±0.30 * 201.50 ±0.30
(2)	View Area	253.50 ±0.20 * 189.00 ±0.20
(3)	Active Area	245.00 ±0.20 * 183.00 ±0.20
(4)	Total Thickness	2.10 ±0.20
(5)	Tail Length	80.00 ±1.00

Note: Refer to Appendix-2 for details

3. ENVIRONMENTAL CHARACTERISTICS

Status		Temperature	Humidity (No Condensation)
(1)	Operation	0°C ~ +50°C	20% ~ 85%RH
(2)	Storage	-20°C ~ +70°C	10% ~ 90%RH

Note: The environment is of normal atmosphere pressure.

4. OPTICAL CHARACTERISTICS

Item		Specification
(1)	Transparency	≥78% @wave length 550nm
(2)	Newton Ring	As per actual samples provided

Note: Transparency and Haze is measured by using BYK-Gardner instrument.

SPK ELECTRONICS CO., LTD.

5. ELECTRICAL CHARACTERISTICS

Item		Specification
(1)	Terminal Resistance	Up : 150~750 Ω ,Down : 300~900 Ω
(2)	Linearity	X axis \leq 1.5% ,Y axis \leq 1.5% (Test method reference Item 9)
(3)	Chattering	\leq 30ms
(4)	Insulation	\geq 20M Ω /25V(DC)
(5)	Endurance	No arcing damage at DC 25V/60sec.
(6)	Operative Resistance	\leq 2K Ω

6. MECHANICAL CHARACTERISTICS

Item		Condition	Specification
(1)	Operation Force	Stylus = R0.8	\leq 50g
(2)	Impact	13.0 ϕ DIA. Steel Ball/9g Height = 30cm	1 time, no damage (Impact at center area)
(3)	Static Load	5kg at ϕ 10 mm area for 30 Sec	Satisfy (1),(2),(4) Of Item 5 and (1) of Item 6
(4)	Hardness	3H pencil, pressure 1n/45 $^{\circ}$ (JIS K5400)	\geq 3H
(5)	Peeling	800g/cm by 90 degree	Satisfy (1) Of Item 5
(6)	Bending	10 times by radius R:1mm 500g left & right 135 degree	Satisfy (1) Of Item 5

SPK ELECTRONICS CO., LTD.

7. RELIABILITY

Item		Condition	Specification
(1)	Constant Temperature / Humidity	60°C/90%RH ,120 hrs and normalized for 4 hrs	Satisfy (1),(2), of Item 4; (1),(2),(4) Of Item 5; (1) of Item 6
(2)	Heat Cycle	70°C/120 hrs and normalized for 4 hrs	Same as above
(3)	Cold Cycle	-20°C/120 hrs and normalized for 4 hrs	Same as above
(4)	Thermal Cycle	-20°C~+70°C (0.5hr each), 10 Cycles (within 24 hr) and normalized for 4 hrs	Same as above

8. DURABILITY

Item		Condition	Specification
(1)	Write Test	100,000 times, Force 250g, R0.8	Satisfy(1),(2),(4) of Item 5; (1) of Item 6
(2)	Knock Test	1,000,000 times, Force 250g, 3HZ, R8/HS60	Same as above

SPK ELECTRONICS CO., LTD.



9.INSPECTION METHODS

(1) Linearity Condition

Voltage (DC 5V) is applied to X1 or Y2 and ground (0V) is applied to X2 or Y1.

Using stylus to draw straight lines (LX and LY) at 5 mm intervals within active area and detect the voltage at Y2 or X1.



To Measure the voltage differences between X1 and X2 or Y1 and Y2.

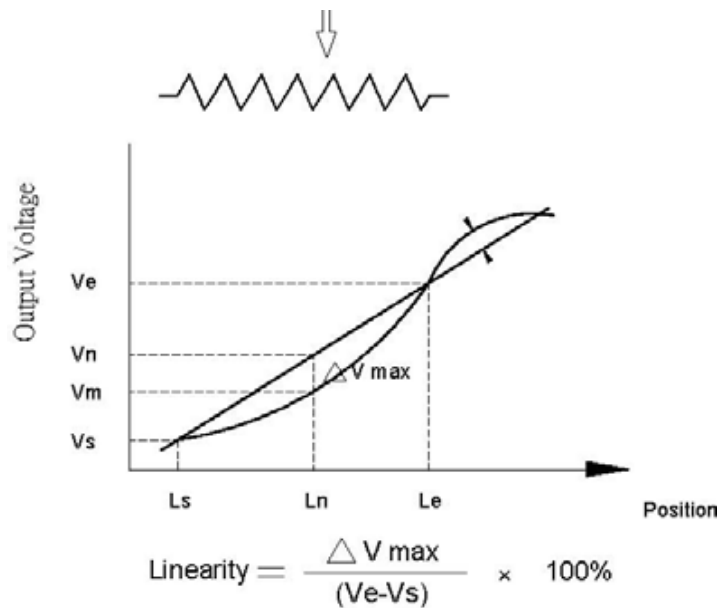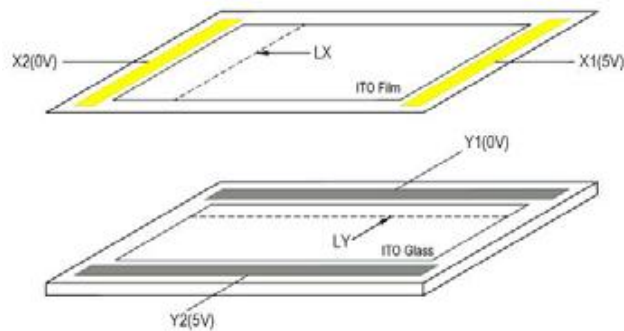

SPK ELECTRONICS CO., LTD.

10.APPEARANCE INSPECTION

- (1) The flaws and impurities are allowed outside viewing area except for those affecting electrical functions.
- (2) The inspection shall be performed by using one 17w fluorescent lamp as back or side light. The panel shall be placed at 30cm away from eyes(as illustrated in the followings).



(3) Glass flaw

Corner flaw		$X \leq 3.0\text{mm}$ $Y \leq 3.0\text{mm}$ $Z \leq T$
Edge flaw		$X \leq 3.0\text{mm}$ $Y \leq 3.0\text{mm}$ $Z \leq T$
Progressive flaw		None allowed


T=Glass thickness

Please refer to Appendix I : Appearance Specification.

SPK ELECTRONICS CO., LTD.

11.ATTENTION FOR MOUNTING CONDITION

- (1) The Support which fixes the touch panel must be designed outside of Viewable Area.
To avoid accidental pressing on touch panel, Enclosure must be designed with enough clearance to panel surface.
- (2) Bezel opening must be between Viewable Area and Active Area..
Bezel opening must not touch Viewable Area. (3)
We recommend elastic material made Support.
- (4) Do not use adhesive to bond Top Surface (ITO Film) of touch panel with Enclosure.
- (5) Edges of touch panel is conductive.
Do not touch it with metal after mounting.

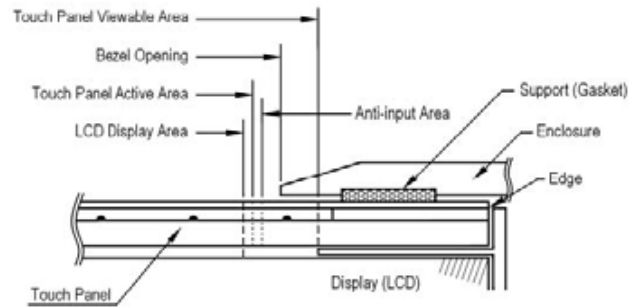


SPK ELECTRONICS CO., LTD.

12.CAUTIONS

Storage	(1) Store packaged products at the temperature and humidity mentioned in the specification with care. Do not expose products to direct sunlight or stress such as that caused by piling.
Unpacking	(1) Check for the correct vertical direction of the package before unpacking.
Handling	(1) Clean finger sacks or gloves and mask are required during handling to prevent finger-prints or stain on the products and damages to the products caused by sharp edges. (2) Do not handle the viewing area of the panel. (3) Do not handle the panel at the tail (connector) to prevent detachment of the tail to the panel.
Cleaning	(1) Clean and soft clothes with neutral detergent or with ethanol may be used for cleaning. (2) Do not use any chemical solvent, acidic or alkali solution. (3) Do not allow liquid from soaking into the joint of film and glass which may result in peeling or malfunctioning.
Installing and Assembling	(1) Excessive force or strain to the panel or the tail is prohibited. (2) Provide a clearance of at least 0.3mm between panel and display module (3) The panel is designed with air groove. Insulation and cushioning pads should be designed around the edges of the panel to prevent liquid penetration or dust gathering.
Operating	(1) Operate with a stylus (tip R0.8 or over), or with a finger without applying excessive load. Sharp edged or hard articles are prohibited. (2) The gathering of dew in the panel may occur with abrupt temperature or humidity changes. A stable environment condition is recommended.
Others	(1) Keep the surface clean. No adhesives should be applied. (2) Avoid high voltage and static charge.

絕對禁止沿著機殼[□] 周邊緣做劃線動作，如此會令PET/FILM因承受極大的壓力而破壞，更會因此而使得 Touch Panel喪失功能。如圖。

It is absolutely forbidden to draw lines along with the edge of the housing because the extreme force will damage the PET/FILM and cause the failure of the touch panel.



SPK ELECTRONICS CO., LTD.

【Appendix-1】

Appearance Specification

Unit : mm

Particle	(1) Diameter ≤ 0.25 (each area contains ≤ 3 particles, total ≤ 5 particles) \rightarrow OK (2) $0.25 < \text{Diameter} \leq 0.4$ (each area contains ≤ 3 particles, total ≤ 5 particles) \rightarrow OK (3) Diameter > 0.4 \rightarrow NG
Blur Stain	(1) Diameter ≤ 0.25 (each area contains ≤ 3 particles, total ≤ 5 particles) \rightarrow OK (2) $0.25 < \text{Diameter} \leq 0.4$ (each area contains ≤ 3 particles, total ≤ 5 particles) \rightarrow OK (3) Diameter > 0.4 \rightarrow NG
Linear Object	(1) Width ≤ 0.05 and Length ≤ 12 \rightarrow OK (2) $0.05 < \text{Width} \leq 0.1$ and Length ≤ 5 , total ≤ 3 objects \rightarrow OK (3) Width > 0.1 and Length > 0.2 \rightarrow NG (4) Curled objects are regarded as particles
Blister	(1) As per actual samples provided
Fish Eye (Spread White Spots)	(1) Diameter ≤ 0.5 \rightarrow OK (2) Diameter > 0.5 \rightarrow NG (3) Each area contains ≤ 3 spots, total ≤ 5 spots \rightarrow OK
Newton Ring	(1) As per actual samples provided
Color Tone	(1) As per actual samples provided
Scratch	(1) $0.05 < \text{Width} \leq 0.1$ and Length ≤ 12 , total ≤ 5 scratches \rightarrow OK (2) Width > 0.1 or Length > 12 \rightarrow NG
Interference Pattern	(1) Inspection according to the standard testing methods
Damages to Glass A. Corner B. Edges	(1) Length ≤ 2 , Width ≤ 2 , Depth $\leq 1/3T$, Total ≤ 2 damages \rightarrow OK (2) Damages with possible worsening disallowed



【Appendix-2】

Engineering Drawing

SPK ELECTRONICS CO., LTD.

PIN ASSIGNMENT

XE XR YD YU

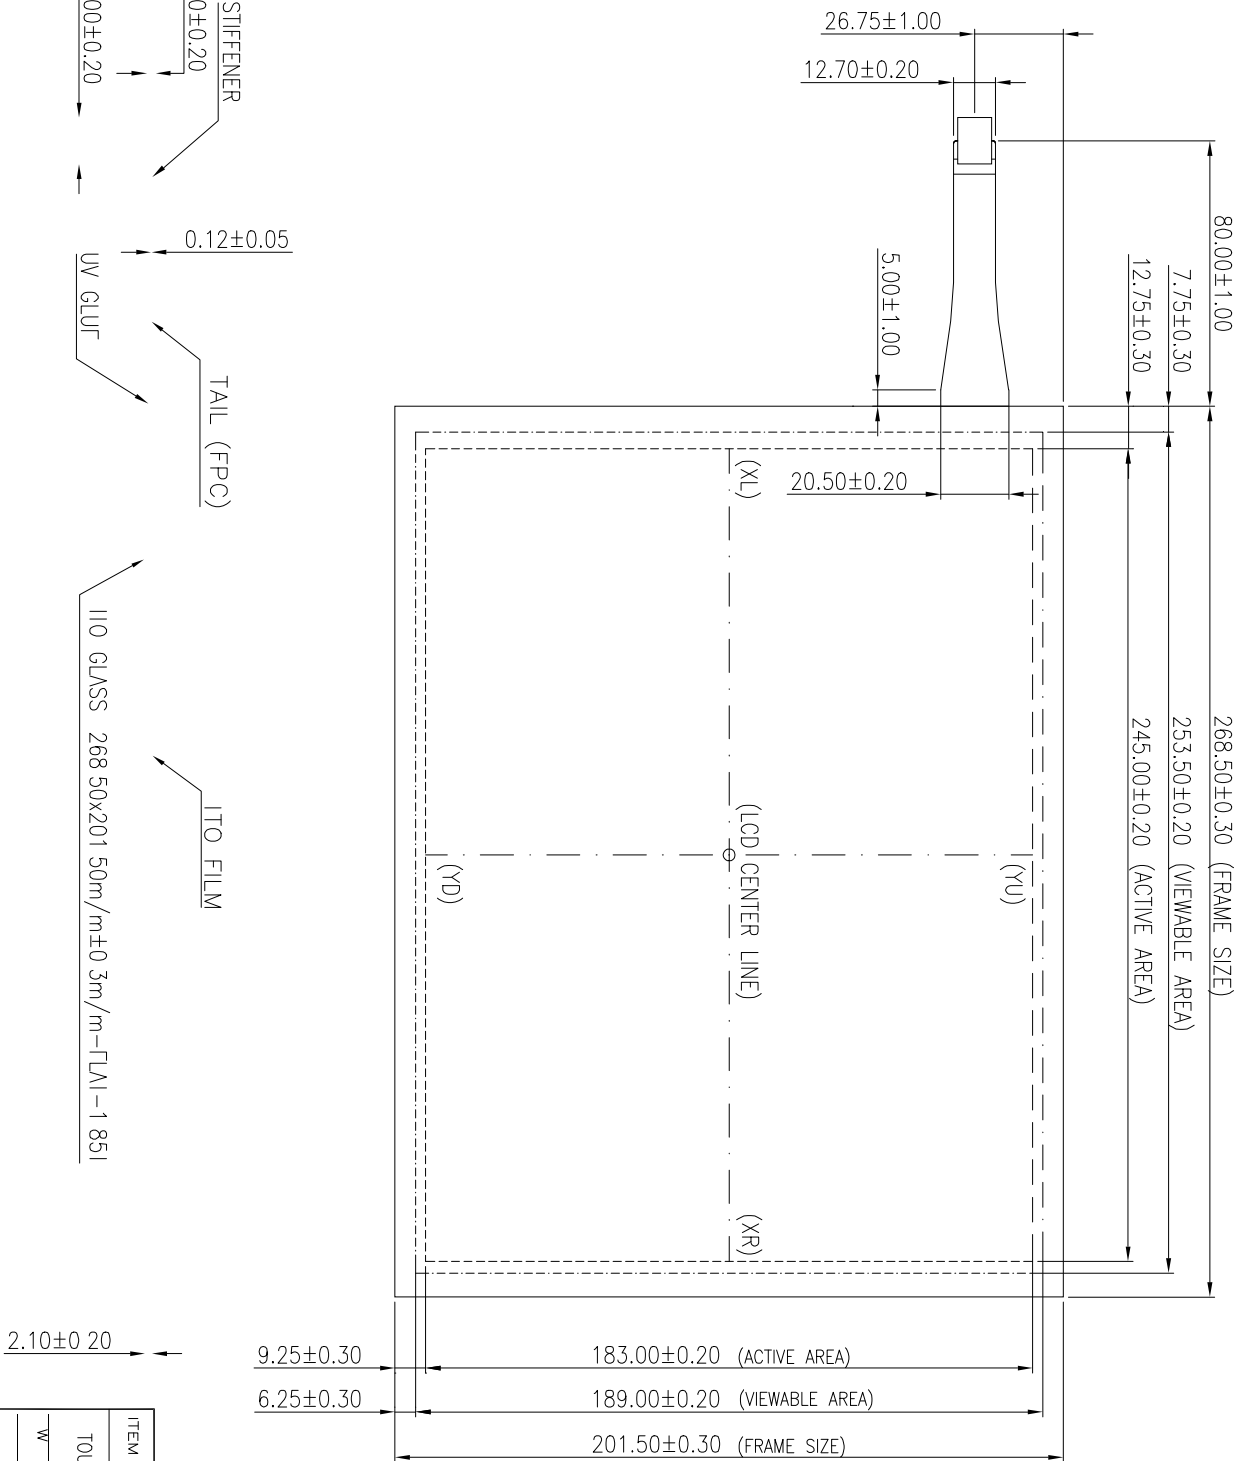

HOUSING

ITEM NO.	TR4-121F-21		
TOUCH PANEL DIMENSION FOR LCD 12.1 INCH			
W	4=12121	PRV	D
C-EG	20060119	UN	/
D-SGN		OL	
DP/VW			