

SPK ELECTRONICS CO., LTD.[illegible]

TABLE OF CONTENTS

1. FEATURES.....	Page 4
2. DIMENSIONS.....	Page 4
3. ENVIRONMENTAL CHARACTERISTICS.....	Page 5
4. OPTICAL CHARACTERISTICS.....	Page 5
5. ELECTRICAL CHARACTERISTICS.....	Page 5
6. MECHANICAL CHARACTERISTICS.....	Page 6
7. RELIABILITY.....	Page 6
8. DURABILITY.....	Page 6
9. LINEARITY INSPECTION METHOD.....	Page 7
10. APPEARANCE INSPECTIONS.....	Page 8
11. ATTENTION FOR MOUNTING CONDITION.....	Page 9
12. WARRANTY.....	Page 9
13. CAUTIONS.....	Page 10
14. APPENDICES.....	Page 10

SPK ELECTRONICS CO., LTD.

3. ENVIRONMENTAL CHARACTERISTICS

Status		Temperature	Humidity (No Condensation)
(1)	Operation	-20~70	20~85%RH
(2)	Storage	-30~85	10~90%RH

Note: The environment is of normal atmosphere pressure

4. OPTICAL CHARACTERISTICS

Item		Specification
(1)	Transparency	81±2 % @wave length 550nm

Note1: Transparency is measured by using BYK-Gardner instrument.

Note2: Test method-satisfy (2) of item 10.

5. ELECTRICAL CHARACTERISTICS

Item		Specification
(1)	Terminal Resistance	Up:500~1200 , Down: 150~550
(2)	Linearity	1.5% (Test method reference Item 9)
(3)	Operation Voltage	5VDC
(4)	Chattering	30ms
(5)	Insulation	20M /25V(DC)
(6)	Endurance	No arcing damage at DC 25V/60sec.
(7)	Operative Resistance	2K

SPK ELECTRONICS CO., LTD.

6. MECHANICAL CHARACTERISTICS

	Item	Condition	Specification
(1)	Activation Force	Stylus R0.8	Avg: 5~50g
(2)	Impact	22.0mm Steel Ball/45g Height = 30cm	1 time, no damage (Impact at center area)
(3)	Static Load	15kg at 20mm area for 30 Sec	Satisfy (1), (2), (4) of item 5 and (1) of item
(4)	Hardness	3H pencil, pressure 1n/45°(JIS K5400)	3H
(5)	Tail Peeling	800g/cm by 90 degree	Satisfy (1) of item 5
(6)	Tail Bending	10 times by radius R:1mm 500g left & right 135 degree	Satisfy (1) of item 5

7. RELIABILITY

	Item	Condition	Specification
(1)	Constant Temperature / Humidity	60 /90%RH ,120 hrs and normalized for 4 hrs	Satisfy (1), (2), of item 4; (1), (2), (4) of 5; (1) of item 6
(2)	Heat Cycle	85 /120 hrs and normalized for 4 hrs	Same as above
(3)	Cold Cycle	-30 /120 hrs and normalized for 4 hrs	Same as above
(4)	Thermal Cycle	-30~85 (0.5hr each), 10 Cycles (within 24 hr) and normalized for 4 hrs	Same as above

8. DURABILITY



	Item	Condition	Specification
(1)	Finger Touch	1,000,000 times, R8, Silicon Rubber, 250g (Please refer to Appendix II)	Satisfy(1),(2),(4) of item 5; (1) of item 6
(2)	Pen Sliding	100,000 times, R0.8, Stylus, 250g (Please refer to Appendix II.)	Satisfy(1), (2), (4) of item 5; (1) of item

9. LINEARITY INSPECTION METHOD

Voltage (DC 5V) is applied to X1 or Y2 and ground (0V) is applied to X2 or Y1.



Use stylus to draw straight lines (LX and LY) at 5 mm intervals within active area and detect the voltage at Y2 or X1.

Measure the voltage differences between X1 and X2 or Y1 and Y2.

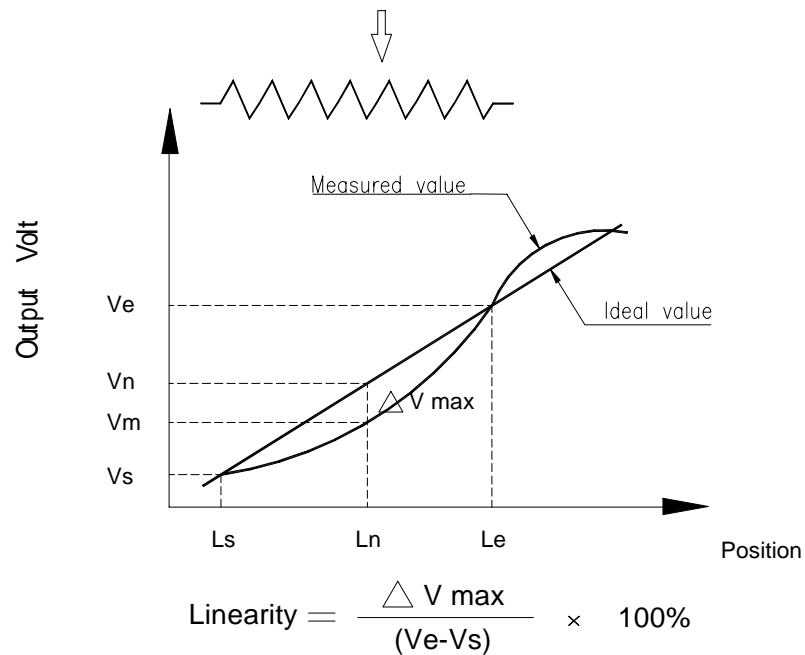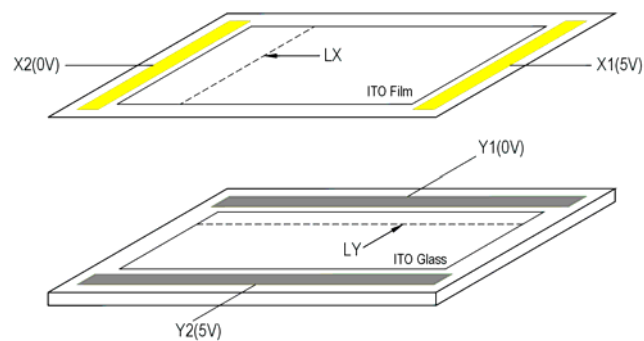

10. APPEARANCE INSPECTIONS

- (1) The flaws and impurities are allowed outside of the viewing area except for those affecting electrical functions.
- (2) The inspection shall be performed by using one 1200 ± 200 LUX fluorescent lamp as back or side light. The panel shall be placed at 30cm away from eyes as shown below.

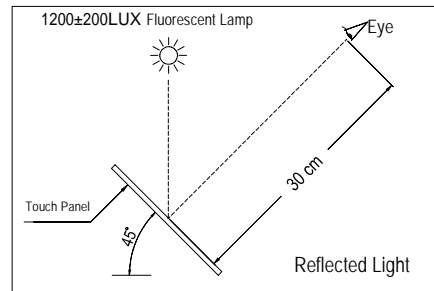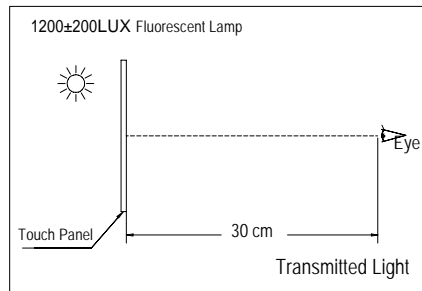

- (3) Glass flaw


Corner flaw		Please refer to Appendix I
Edge flaw		Please refer to Appendix I
Progressive flaw		Not allowed

T=Glass Thickness

SPK ELECTRONICS CO., LTD.

11. ATTENTION FOR MOUNTING CONDITION

- (1) The support which fixes the touch panel must be designed outside of Viewable Area.
To avoid accidental pressing on the touch panel, enclosure must be designed with enough distance to panel surface.
- (2) Bezel opening must be in between Viewable Area and Active Area.
Bezel opening must not touch Viewable Area.
- (3) We recommend elastic material made support.
- (4) Do not use adhesive to bond top surface (ITO Film) of touch panel with enclosure.
- (5) After mounting, avoid direct metal contact with edges of the panel.

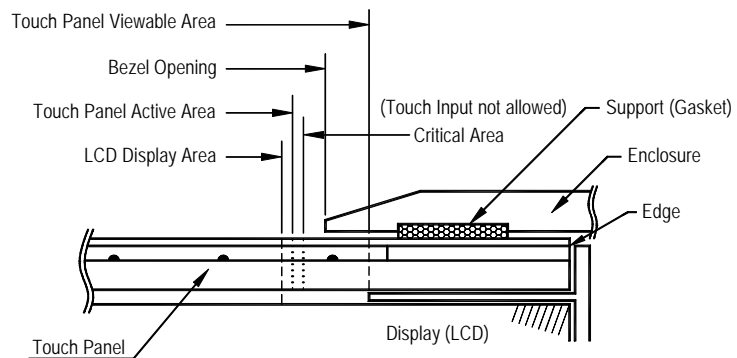

12. WARRANTY

With the exceptions listed below, all SPK's products are guaranteed free of manufacturing defects for a period of up to one year. All defected products will be repaired or exchanged free of charge if determined to be the responsibility of SPK. SPK reserves the sole discretion in determining the causes and the responsibilities of any defects or damages. For details, please refer to SPK's "Product Warrant Policy".

List of Exceptions:


1. Damages caused by improper handling of clients, including and not limited to, during shipping or manufacturing processes.
2. Damages caused by disasters, either by natural causes or human factors, after the delivery of products.
3. Any repairs, modifications or disassembling of SPK's products without prior notification to and the consent of SPK.

SPK ELECTRONICS CO., LTD.

13. CAUTIONS

Storage	(1) Store packaged products at the temperature and humidity mentioned in the specifications with care. Do not expose products to direct sunlight or stress such as that caused by piling.
Unpacking	(1) Check for the correct direction of the package before unpacking.
Handling	(1) Clean finger sacks or gloves and mask are required during handling to prevent finger-prints or stain on the products and damages to the products caused by sharp edges. (2) Do not handle the viewing area of the panel. (3) Do not handle the panel at the tail (connector) to prevent detachment of the tail to the panel.
Cleaning	(1) Clean and soft clothes with neutral detergent or with ethanol may be used for cleaning. (2) Do not use any chemical solvent, acidic or alkali solution. (3) Do not allow liquid from soaking into the joint of film and glass that may result in peeling or malfunctioning.
Installing and Assembling	(1) Excessive force or strain to the panel or the tail is prohibited. (2) Provide a clearance of at least 0.3mm between panel and module. (3) The panel is designed with air groove. Insulation and cushioning pads should be designed around the edges of the panel to prevent liquid penetration or dust gathering.
Operating	(1) Operate with a stylus (tip R0.8 or over), or with a finger without applying excessive load. Sharp edged or hard articles are prohibited. (2) The gathering of dew in the panel may occur with abrupt temperature or humidity changes. A stable environment condition is recommended.
Others	(1) Keep the surface clean. No adhesives should be applied. (2) Avoid high voltage and static (3) SPK reserves the right to substitute materials with the same grade and specification.

It is absolutely forbidden to draw lines along with the edge of the housing because the extreme force will damage the upper layer and cause the failure of the touch panel.



14. APPENDICES

Appendix I	Appearance Specifications
Appendix II	Durability Test Method
Appendix III	Cautions for Product Handling
Appendix IV	Packing Method

SPK ELECTRONICS CO., LTD.

[Appendix I]

Appearance Specifications

Page: 1/1

Defect Name	Criteria	Judgment
Particle	D ≤ 0.25	OK
	0.25 < D ≤ 0.3	Each Area ⁽³⁾ 2, Total 5, OK
	D > 0.3	NG
Blur Stain and Interference Pattern	D ≤ 0.25	OK
	0.25 < D ≤ 0.3	Each Area ⁽³⁾ 2, Total 5, OK
	D > 0.3	NG
Linear Object	W ≤ 0.05 and L ≤ 12	OK
	0.05 < W ≤ 0.1 and L ≤ 12	Total 3, follow Condition 1, OK
	W > 0.1 and L > 12	NG
Scratch	W ≤ 0.05 and L ≤ 12	OK
	0.05 < W ≤ 0.1 and L ≤ 12	Total 5, follow Condition 1, OK
	W > 0.1 and L > 12	NG
Damage to Glass A: corner flaw B: Edge flaw	X 2, Y 2, Z 1/3T Please refer to the figures in page 8	Total 2, OK Damages with possible worsening are not allowed
Condition 1: Distance between defects should not be less than 20mm. Note 1: Particle, Stain or Linear Object that can be clean out easily within 3 times is disregarded. Note 2: All dimensions in mm unless otherwise stated.		


Item	Name of Defect	Definition
1	Dimension	D: Average Diameter; W: Width; L: Length; T: Glass Thickness
2	Inspection Area	According to engineering drawing, Viewable Area is the Inspection Area. Any defect outside of the Viewable Area may be disregarded.
3	Each Area	One of the areas of T/P Viewable Area divided into 9 (3 by 3) equal areas.
4	Stain	No clear outline, not easy to identify with eyes, but able to clean out by wiping.
5	Interference Pattern	No clear outline, not easy to identify with eyes and unable to clean out by wiping.

[Appendix II]


Durability Testing Method

1. Finger Touch:

- ⑨ Test Position: Center of Active Area (Fig. 1)
- ⑨ Test pen: R8.0 Silicon Rubber (Fig. 2)
- ⑨ Test Method: Knock at the same location.

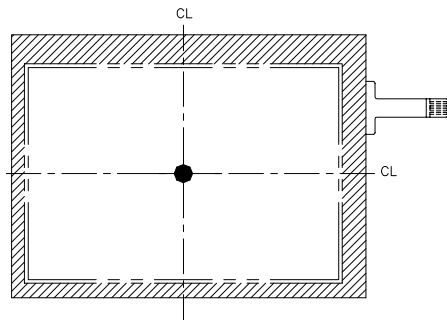


[Fig. 1]

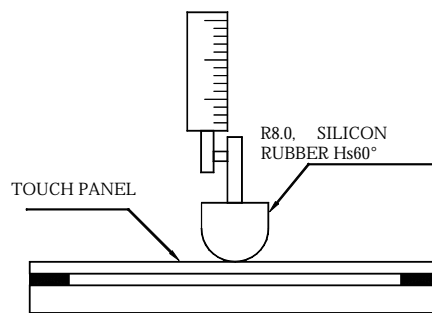


[Fig. 2]

2. Pen Sliding:

- ⑨ Test Position: Center of Active Area 20mm×20mm (Fig. 3)
- ⑨ Test Pen: R0.8 polyacetal Stylus (Fig. 4)
- ⑨ Test Method: Draw lines at the same location.

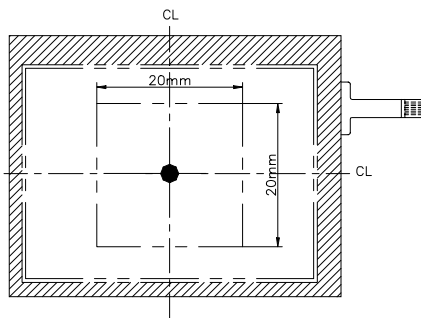


[Fig. 3]

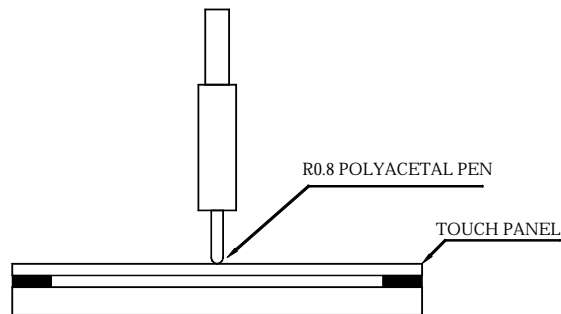

[Fig. 4]

SPK ELECTRONICS CO., LTD.


Cautions for Product Handling







Note: To prevent malfunction as a result of improper handling of touch panel product, please make sure that the following instructions are followed:

[Appendix III]

- 1、Wear gloves at all time upon handling touch panel ,and hold touch panel only at the edge of the panel.
- 2、Use only the standard polyacetal rod pen (with a radius of 0.8 at the end of the rod) for product testing.
(Fig: 1,2,3)

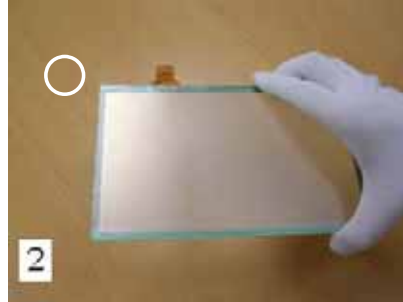


- 3、Do not lift touch panel via the connector (Tail). [Excess force applied on the Tail may cause displacement of the connector or cracks at the base of the panel.] (Fig: 4,5,6)
- 4、Do not handle the touch panel via the surface of the panel. [Excess force applied on the touch panel may crack the glass layer of the touch panel.] (Fig: 7,8)
- 5、Do not pile up touch panels together or place heavy substance on the touch panel. [Excess stress on the touch panel may scratch the surface of the touch panel, or crack the touch panel.] (Fig:9,10)
- 6、Do not touch the surface of the touch panel via sharp objects. [Sharp objects may cause scratch on the surface of the touch panel.] (Fig: 11)
- 7、Do not place the face of the film on the table or any other surface. [Various objects on the table may scratch the surface of the touch panel.] (Fig: 12)

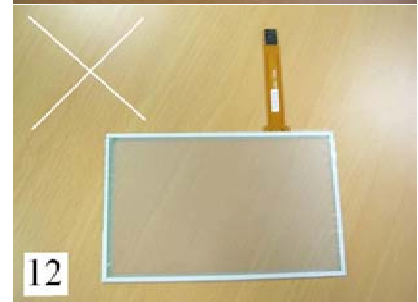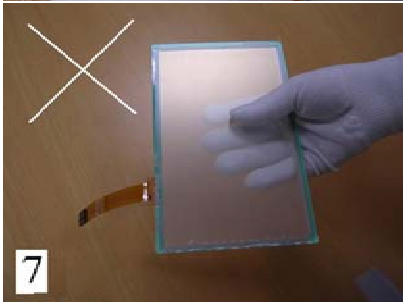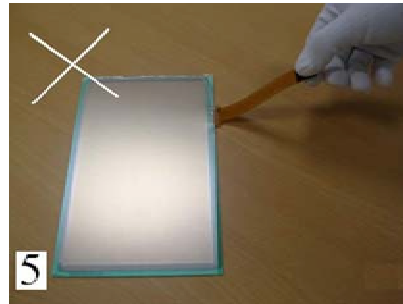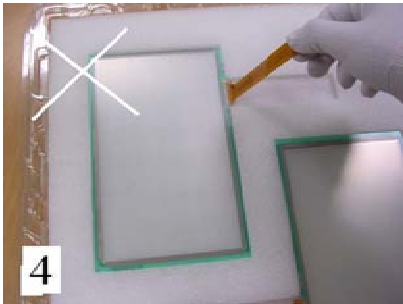


[Appendix IV]

Packing Method

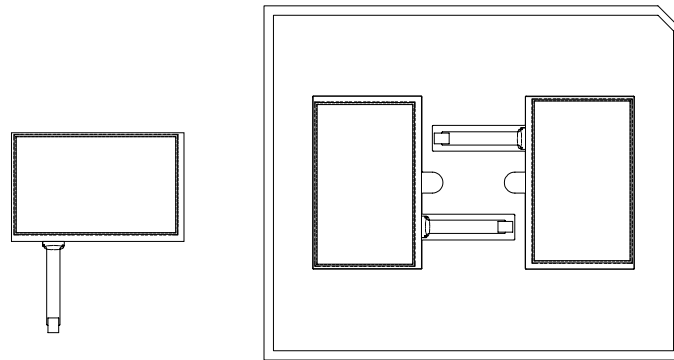

2 Pcs of T/P per Tray

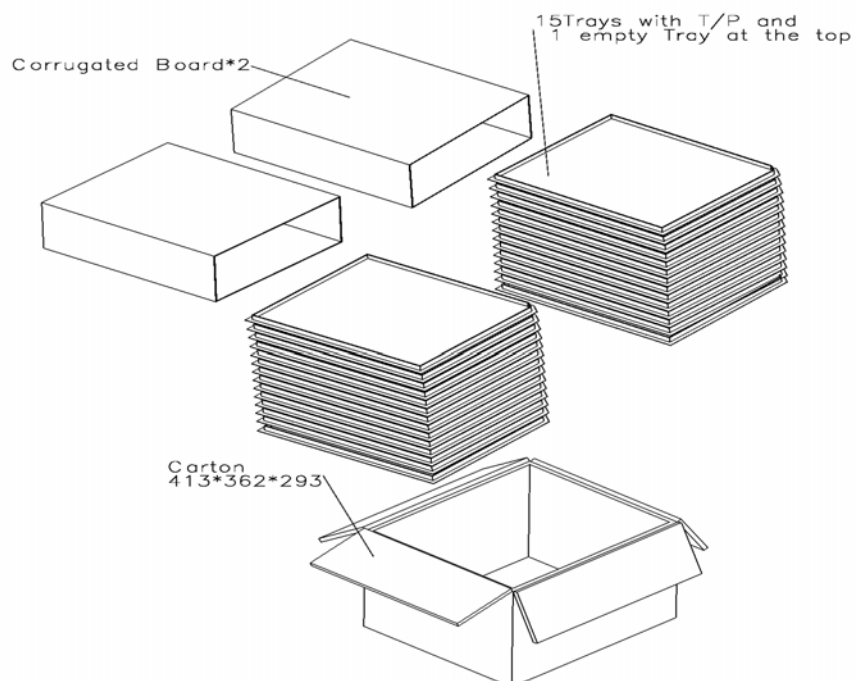

Packing Qty: 60pcs per carton