


Product No: SPK-PD-7002700-50

2 Way DC Blocking Power Divider

Preliminary Specifications

Serial	Parameters	
1	Way	2
2	Frequency Range	0.7~2.7GHz
3	Insertion Loss	≤0.4dB (Does not contain theory loss 3.0 dB)
4	VSWR	≤1.25:1(Input) ≤1.15:1(Output)
5	Isolation	≥22dB
6	Amplitude Balance	±0.2dB max
7	Phase Balance	±2°max
8	Impedance	50 ohms
9	Power Handling	Forward ≤40Watt; Reversed ≤40Watt
10	Surface Finish	Silvery White or Black Paint
11	Connectors	SMA-Female
12	Operating Temperature	-55°C to +85°C
13	Configuration	As Below (Size Unit: mm [inch])

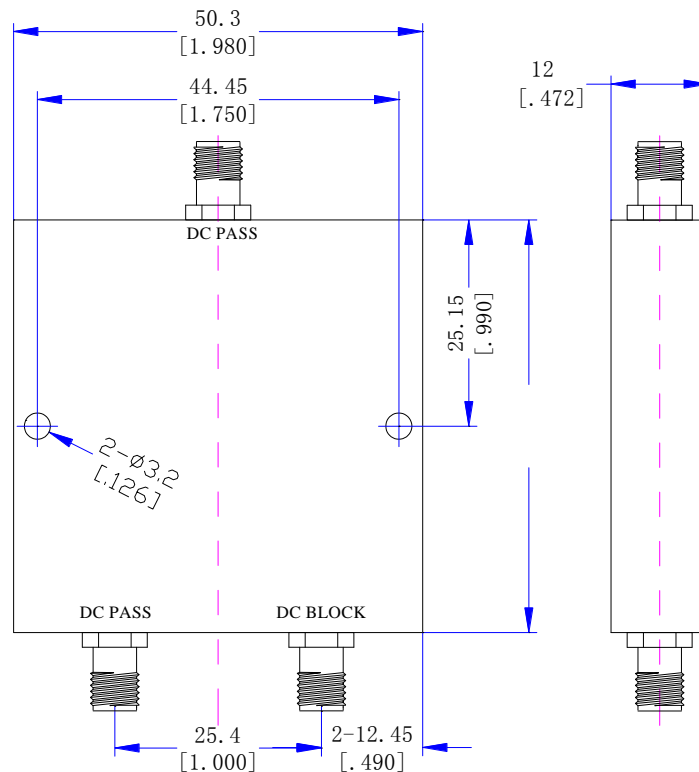

Add : 10F,NO.510,SEC.5,CHUNG HSIAO E. RD, TAIPEI, TAIWAN

Tel : 02-2346-2323

Fax : 02-2346-3939

E-mail : spk@spkecl.com WEB:<http://www.spkecl.com>